



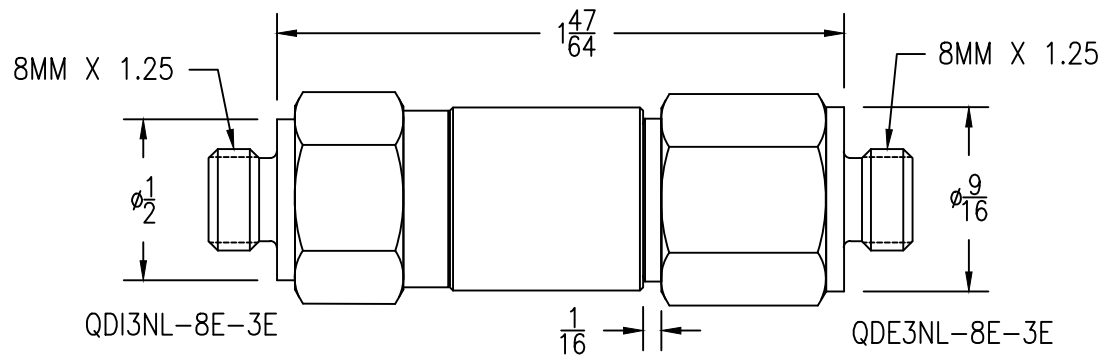

MAX ENGAGEMENT

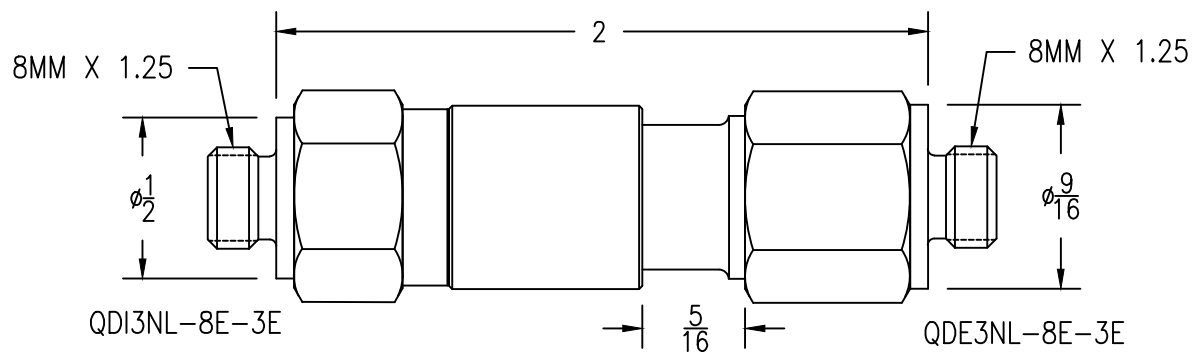

FLOW STARTS

P/N: QDI3NL-8E-3E, QDE3NL-8E-3E
QDC BODY MATERIAL: S30300 STAINLESS STEEL
BUSHING MATERIAL: LOW-FRICTION ALLOY
SPRING MATERIAL: S30200 STAINLESS STEEL
SEAL MATERIAL: EPDM

												QDC-DB, 8MM, NON-LATCHING ENGAGEMENT DEPTH					
REV	NO.	CHANGE		APP	DATE	REV	NO.	CHANGE		APP	DATE	SCALE:	APPROVED BY:	DRAWN: MW			
be beswick engineering co., inc. greenland, new hampshire 03840 this drawing and all novel ideas contained in or suggested thereby, in whole or in part, are the property of Beswick Engineering Co., Inc. and are not to be reproduced or used without written permission.												DATE: 06/11/24	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMAL:± .005 FRACTIONAL:± 1/64 ANGULAR:± 1/2		REV.		
												SURFACE FINISH UNLESS OTHERWISE SPECIFIED: 125/√			USED ON DRAWING NO:	DRAWING NO: SPEC	